


A Section A
1 : 10

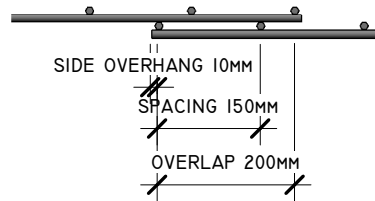

B Section B
1 : 10

MAIN WIRE DIAMETER	6mm
LONG WIRE LENGTH	4560mm
SHORT WIRE LENGTH	1970mm
SHEET GROSS	8.9832m ²
SHEET NET	7.525m ²
SPACING	150mm
SIDE OVERHANG	10mm
END OVERHANG	30mm
LAP	200mm

STRENGTH (KN/METER WIDTH)	94.2478
WIRE GRADE	500L
TOTAL WEIGHT (KG)	27.724
KG'S PER m ²	2.95901m ²

YIELD STRENGTH	≥500Mpa & ≤750MPa
CROSS SECTION	188.49
UNIFORM ELONGATION	≥1.5%

United Steel 664 Standard Mesh

M664

Manufactured in accordance with AS/NZS4671:2019 Steel Reinforcing Materials. Batch test certificates available on request. Lap diagrams in accordance with NZS3103:2006 Concrete Structures Standard. Please consult your engineer for your project specific lap splice.

Drawn by: United Steel

United Steel

Reference Designer

Date MAR 2023

Scale As indicated Sheet

01