


A Section A
1 : 10

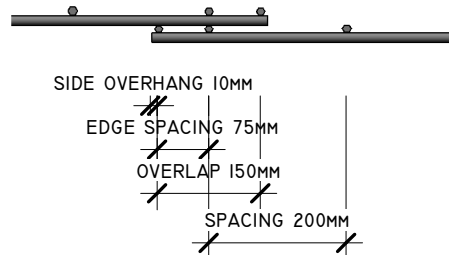

B Section B
1 : 10

MAIN WIRE DIAMETER	7.00mm
EDGE WIRE DIAMETER	6.10mm
LONG WIRE LENGTH	6410mm
SHORT WIRE LENGTH	2370mm
EDGE WIRE SPACING	75mm
SHEET GROSS	15.17m ²
SHEET NET	13.64m ²
SPACING	200mm
SIDE OVERHANG	10mm
END OVERHANG	30mm
LAP	150mm

STRENGTH (KN/METER WIDTH)	96.21
WIRE GRADE	500E
TOTAL WEIGHT (KG)	49.54
KG'S PER m ²	3.021m ²

YIELD STRENGTH	500<X<600MPa
CROSS SECTION	192.42
UNIFORM ELONGATION	>10%

United Steel 72 Double Edge Mesh

ML72DE

Manufactured in accordance with AS/NZS4671:2019 Steel Reinforcing Materials. Batch test certificates available on request. Lap diagrams in accordance with NZS3103:2006 Concrete Structures Standard. Please consult your engineer for your project specific lap splice.

Drawn by: United Steel

United Steel

Reference Designer

Date SEP 2024

Scale As indicated Sheet

01